

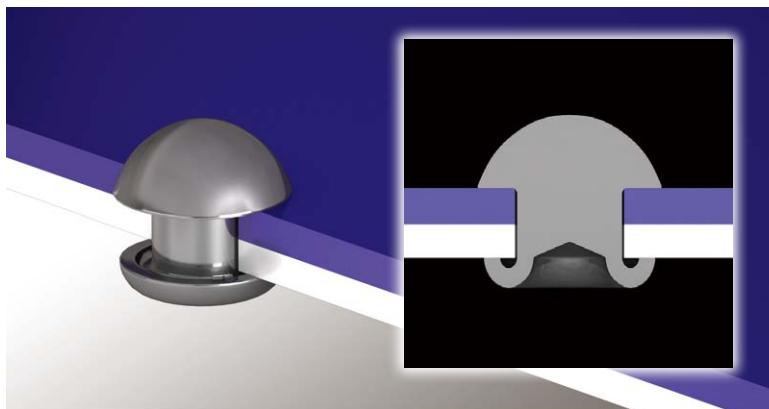



# Round, Semi-Tubular Rivet

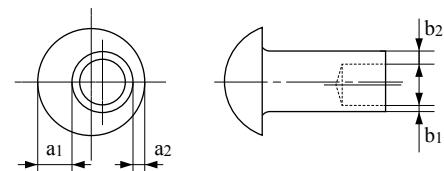


## Shape and symbols of standard dimensions

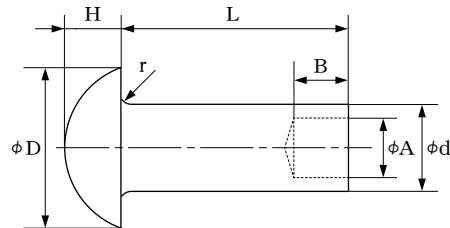

(Eccentricity of head) (Eccentricity of hole)



(Tilt of head)



(Tilt of end face)

## Calculation of under-head shank length

Material thickness t	$L = \frac{\text{Shank diameter}(d) \times \text{Coefficient}(0.6) + \text{Material thickness}(t)}{1}$
Shank diameter d	*1. Shank diameter (d) x 0.6 = swaging margin (K) *2. Use coefficient (0.5) as a guide for SUSXM7 (with hole diameter/depth between 0.75 d and 0.77 d)
Swaging margin K	*3. The under-head shank length L should be less than 5 times the shank diameter or in the case of stainless steel less than double.
Under-head shank length L	[When a length exceeding the specification is required, please ask us.]

The length obtained by this calculation shall be used as a guide.

## Specification table

		Unit (mm)								
Nominal diameter		1.2	1.6	2	2.5	3	4	5	6	8
d	Standard	1.2	1.6	2	2.5	3	4	5	6	8
	Tolerance	+ 0.02 - 0.05		0 - 0.08		0 - 0.10		0 - 0.12	0 - 0.15	0 - 0.15
D	Standard	2.2	3	3.7	4.6	5.4	7.2	9	10.5	13.5
	Tolerance	0 - 0.3			0 - 0.4			0 - 0.5	0 - 0.6	0 - 0.6
H	Standard	0.7	1	1.2	1.5	1.8	2.4	3	3.6	4.8
	Tolerance	± 0.05				± 0.1				
A	Standard	0.8	1.1	1.3	1.7	2.1	2.8	3.5	4.2	5.6
	Tolerance	± 0.04		± 0.05		± 0.07		± 0.10		
B	Standard	1.1	1.4	1.8	2.3 *4	2.7 *4	3.6 *4	4.5 *4	5.4	7.2
	Tolerance	± 0.1		± 0.15		± 0.2		± 0.25	± 0.3	
r	Max	0.06	0.08	0.1	0.2	0.3			0.4	
a1-a2	Max	0.1	0.2					0.3	0.4	
b1-b2	Max	0.1			0.15			0.2		
c	Max	0.2			0.3		0.4			0.5
L	Min	2	2.5	3	3	3.5	4.5	6	8	10
	Max	10	14	14	20	22	28	36	42	56
Recommended work hole diameter	Standard	1.25	1.65	2.1	2.65	3.15	4.2	5.3	6.4	8.5
	Tolerance	+ 0.05 0				± 0.05				± 0.10

\*4. When length L is close to the minimum or maximum, length B shall be 0.8 x d. For details, see the length B list below.

## Tolerance of length L

Nominal diameter		1.2	1.6	2	2.5	3	4	5	6	8	Unit (mm)
Length L	4 or below	± 0.1		± 0.15		—					
	Over 4 to 10	± 0.15		± 0.2		± 0.25					
	Over 10 to 20	± 0.2		± 0.25		± 0.3					
	Over 20 to 40	—		± 0.3		± 0.4					
	Over 40	—		—		± 0.5					

## Length B list


Nominal diameter	2.5	3	4	5
Length L	3	3.5	3.5	4.5
Length B	2.0	2.4	3.2	4.0

## ■ Name


### Low round Semi-tubular $3 \times 5$

① ② ③ ④


- ① Type of head (Low round, truss, flat, countersunk and round)
- ② Rivet type (Semi-tubular)
- ③ Nominal diameter (See the specification table.)
- ④ Under-head shank length (See the specification table.)

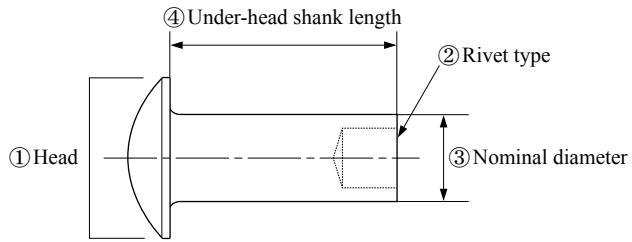

## ■ Types of heads

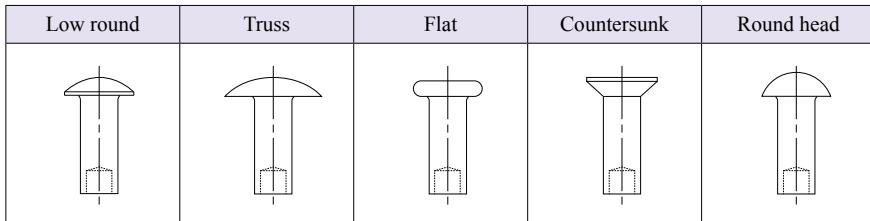

## ■ Rivet type

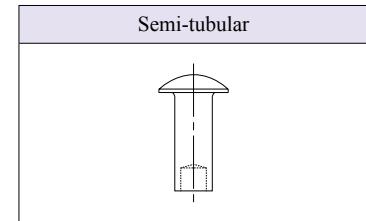

## ■ Types of materials and relevant JIS

Materials			Relevant JIS
Description		Code	
Iron	Carbon steel wire	SWCH	JIS G 3507 "Carbon steels for cold heading"
Brass	Brass wire	C2700W	
Copper	Tough pitch copper wire	C1100W	JIS H 3260 "Copper and copper alloy wires"
Aluminum	Aluminum drawn wire	A1070W A1200W	JIS H 4040 "Aluminum or aluminum alloy wire"
	Aluminum alloy drawn wire	A5052W A5056W	
	Stainless steel wire	SUS430-WR SUSXM7-WR	

## ■ Surface treatment

Types of treatment	Characteristics
Zinc plating	Corrosion resistance
Trivalent chromate on zinc plating	Corrosion resistance
Nickel plating	Decorativeness, Abrasion resistance
Copper plating	Conductivity
Tin plating	Solderability
Gold plating	Conductivity, Corrosion resistance, Decorativeness
Silver plating	Conductivity, Decorativeness
Chrome plating	Corrosion resistance, Abrasion resistance, Decorativeness

## ■ Strength test results by material and shank diameter

Nominal diameter		φ1.2	φ1.6	φ2	φ2.5	φ3	φ4	φ5	φ6	φ8	Unit (kN)
Material	SWCH10A	Tensile	0.29	0.49	0.85	1.23	1.69	3.00	4.69	6.76	12.02
		Shear	0.34	0.61	0.96	1.50	2.17	3.86	6.03	8.68	15.43
	SUS430	Tensile	0.39	0.66	1.14	1.66	2.27	4.03	6.31	9.08	16.15
		Shear	0.45	0.80	1.26	1.97	2.84	5.05	7.89	11.36	20.20
	SUSXM7	Tensile	0.48	0.81	1.39	2.03	2.77	4.93	7.71	11.10	19.74
		Shear	0.51	0.91	1.42	2.23	3.21	5.71	8.93	12.86	22.86
	C2700W	Tensile	0.28	0.47	0.81	1.18	1.62	2.88	4.50	6.48	11.53
		Shear	0.31	0.55	0.86	1.35	1.95	3.47	5.42	7.81	13.89
	C1100W	Tensile	0.17	0.29	0.50	0.73	0.99	1.77	2.77	3.99	7.09
		Shear	0.20	0.37	0.58	0.90	1.30	2.32	3.63	5.23	9.30
	A1070W	Tensile	0.07	0.12	0.20	0.28	0.40	0.71	1.16	1.76	2.85
		Shear	0.10	0.18	0.27	0.44	0.60	1.07	1.61	2.25	4.12
	A1200W	Tensile	0.07	0.13	0.20	0.28	0.40	0.71	1.18	1.79	2.88
		Shear	0.11	0.18	0.31	0.46	0.60	1.13	1.74	2.33	4.26
	A5052W	Tensile	0.13	0.23	0.39	0.54	0.74	1.34	2.18	3.15	5.43
		Shear	0.20	0.35	0.56	0.91	1.18	2.21	3.40	4.56	8.32
	A5056W	Tensile	0.17	0.29	0.47	0.60	0.94	1.46	2.61	3.78	6.73
		Shear	0.23	0.40	0.62	1.00	1.30	2.46	3.80	5.20	9.25

Note) Each of the results above is the measured strength of a rivet alone.