


TECHNICAL SPECIFICATION

- High-strength clamping -

[Symbols of standard dimensions and installation diagram]

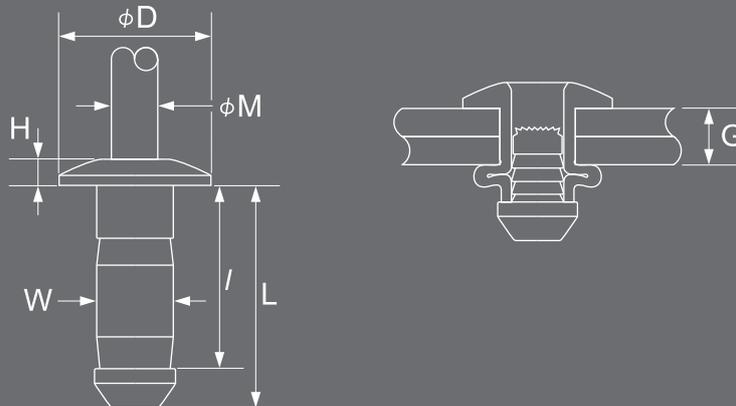

SPECIFICATION TABLE

STAINLESS / STAINLESS DOME HEAD

Sleeve diameter W (in)	Mating hole diameter (in)	Recommended fastening range G (in)	I (in)	L*1 (in)	D (in)	H (in)	M (in)	Strength*2 (kN)	
						Dome head		Tensile	Shear
0.189	0.193 ^{+0.0039} 0	0.126 ~ 0.189	0.472	0.571	0.374	0.067	0.126	5.4	4.5
		0.252 ~ 0.339	0.591	0.689					8.5

Sleeve: Austenitic stainless steel , Mandrel: High-tensile stainless steel wire

This product is made to order

- *1. The L lengths are given as guidelines.
- *2. The strength values are obtained through our own testing.

Remarks)

- (1) The standard dimensions are subject to change without notice.
- (2) Please ask us when the required fastening range exceeds the recommended range or when it is around the lower limit.